

SFP4G-LW-31-10

4Gb/s 10KM SFP Transceiver

Hot Pluggable, Duplex LC, +3.3V, 1310nm, DFP-PIN, SMF 10KM DDM 40°C to 85°C



FEATURES

- Up to 4.25Gb/s Data Links
- Hot-Pluggable
- 1310nm DFB laser transmitter
- Duplex LC connector
- RoHS compliant and Lead Free
- Up to 10KM on 9/125 μm SMF
- Single +3.3V Power Supply
- Digital Diagnostic Monitor Interface
- Compatible with SFF-8472
- Low power dissipation <600mW typically

- Industrial /Extended/ Commercial operating temperature range: -40° C to 85° C/-5° C to 85° C/-0° C to 70° C Version available

APPLICATIONS

- Tri-Rate 1.0625 / 2.125 / 4.25Gb/s
- Fiber Channel
- Fast Ethernet/Gigabyte Ethernet

DESCRIPTION

Fibersum' s SFP4G-LW-31-10 The transceiver consists of three sections: a DFB laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA)1. They are compatible with Fiber Channel per FC-P1-2 Rev. 10.0. also simultaneously compatible with Gigabit Ethernet as specified in IEEE Std 802.3.

Absolute Maximum Ratings

Parameter		Symbol	Min.	Typical	Max.	Unit
Storage Temperature		TS	-40		+85	° C
Supply Voltage		VCCT, R	-0.5		4	V
Relative Humidity		RH	0		85	%
Case Operating Temperature	Industrial	Top	-40		85	° C
	Extended		-5		85	
	Commercial		0		70	

Recommended Operating		Symbol	Min.	Typical	Max.	Unit
Case operating Temperature	Industrial	TC				° C
	Extended					
	Commercial		0		+70	
Supply Voltage		VCCT, R	3.0		3.6	V
Power Supply Rejection			100			mVP-P

Electrical Characteristics (TOP = 0 to 70 ° C, VCC = 3.0 to 3.60 Volts)

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Supply Voltage	Vcc	3.0		3.6	V	
Supply Current	Icc		200	300	mA	
Transmitter						
Input differential impedance	Rin		100		Ω	1
Single ended data input swing	Vin,pp	250		1200	mV	
Transmit Disable Voltage	VD	2		Vcc	V	
Transmit Enable Voltage	VEN	Vee		Vee+ 0.8	V	2
Receiver						
Single ended data output swing	Vout,pp	250	400	800	mV	3
Data output rise/fall time ≤ 2.125 Gb/s	Tr/f			175	ps	4
Data output rise/fall time =4.25 Gb/s	Tr/f			120	ps	4
LOS Fault	VLOS fault	Vcc-0.5		VccHOST	V	5
LOS Normal	VLOS	Vee		Vee+0.5	V	5
Power Supply Rejection	PSR	100			mVpp	6
Deterministic Jitter Contribution ≤ 2.125 Gb/s	RX Δ DJ			51.7	ps	7, 8
Deterministic Jitter Contribution =4.25 Gb/s	RX Δ DJ			25.9	ps	8, 9
Total Jitter Contribution ≤ 2.125 Gb/s	RX Δ TJ			122.4	ps	8
Total Jitter Contribution =4.25 Gb/s	RX Δ TJ			61.2	ps	9

Notes:

1. AC coupled.
2. Or open circuit.
3. Into 100 ohm differential termination.
4. 20 - 80 %
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the power supply filtering network shown on page 23 of the Small Form-factor Pluggable (SFP) Transceiver MultiSource Agreement (MSA) , September 14, 2000. The Power Supply Rejection applies for a supply voltage range of 3.1 to 3.6 V.
7. Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and DJ. Δ
8. As measured at 0.022 mW OMA.

9. As measured at 0.048 mW OMA.

Optical Parameters(TOP = 0 to 70 ° C, VCC = 3.00 to 3.60 Volts)

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Transmitter						
Output Opt. Power	POUT	-8.4		-1	dBm	1
Optical Wavelength	λ	1285		1345	nm	2
Spectral Width	σ			1	nm	2
Optical Modulation Amplitude =4.25 Gb/s	OMA	190			μ W	2, 3
Optical Modulation Amplitude $\leq$ 2.125 Gb/s	OMA	174			μ W	2, 3
Optical Rise/Fall Time =4.25 Gb/s	tr/ tf			90	ps	4
Optical Rise/Fall Time $\leq$ 2.125 Gb/s	tr/ tf			160	ps	5
Relative Intensity Noise	RIN			-118	dB/Hz	
Deterministic Jitter Contribution $\leq$ 2.125 Gb/s	TX Δ DJ			59.8	ps	6
Deterministic Jitter Contribution =4.25 Gb/s	TX Δ DJ			28.2	ps	6
Total Jitter Contribution $\leq$ 2.125 Gb/s	TX Δ TJ			119	ps	
Total Jitter Contribution = 4.25 Gb/s	TX Δ TJ			59.8	ps	
Extinction Ratio = 1.25 Gb/s	ER	9			dB	7
Receiver						
Receiver Sensitivity = 1.0625 Gb/s	RxSENS			0.015	mW	8
				-22	dBm	9
Receiver Sensitivity = 2.125 Gb/s	RxSENS			0.015	mW	8
				-21	dBm	9
Receiver Sensitivity = 4.25 Gb/s	RxSENS			0.029	mW	8
				-18	dBm	9
Average Receiver Power	RxMAX			0	dBm	
Optical Center Wavelength	λ C	1260		1600	nm	
Optical Return Loss		12			dB	
LOS De-Assert	LOSD			-20	dBm	
LOS Assert	LOSA	-30			dBm	
LOS Hysteresis		0.5			dB	
General Specifications						
Data Rate	BR	1062		4250	Mb/s	10
Bit Error Rate	BER			10-12		11
Max. Supported Link Length on 9/125 μ m SMF@ 4X fiber Channel	LMAX1		10		km	12
Max. Supported Link Length on 9/125 μ m SMF@ 1X and 2X fiber Channel	LMAX2		20		km	12

Notes:

1. Class 1 Laser Safety per FDA/CDRH and EN (IEC) 60825 regulations.
2. Also specified to meet curves in FC-PI-2 10.0 Figures 18, 19, and 21, which allow trade-off between wavelength, spectral width and OMA. Rate selectable part is specified to meet IEEE Draft P802.3ah /D2.0 Figure 59-3.
3. Equivalent extinction ratio specification for fiber Channel. Allows smaller ER at higher average power.
4. Unfiltered, 20-80%.
5. Unfiltered, 20-80%.
6. Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and DJ. Δ
7. Applicable for Rate Selectable version only in low bandwidth mode.
8. Measured with conformance signals defined in FC-PI-2 10.0 specifications. Value in OMA.
Measured with PRBS 2 -1 at 10-12 BER.
9. Measured with conformance signals defined in FC-PI-2 10.0 specifications. Represents sensitivity based on OMA spec, as corrected to incoming Extinction Ratio of 13 dB (for example, at 5.75dB incoming extinction ratio, an OMA of 0.029 mW corresponds to -16 dBm sensitivity). Measured with PRBS 2 -1 at 10-12 BER
10. Gigabit Ethernet and 1x/2x/4x fiber Channel compliant.

Tested with a PRBS 2 7-1 test pattern.

Distances are based on FC-PI-2 10.0 and IEEE 802.3 standards.

Digital Diagnostic Monitor Characteristics

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales stuff..

Parameter	Symbol	Min.	Max.	Unit
Temperature monitor absolute error	DMI_Temp	-3	3	degC
Laser power monitor absolute error	DMI_TX	-3	3	dB
RX power monitor absolute error	DMI_RX	-3	3	dB
Supply voltage monitor absolute error	DMI_VCC	-0.1	0.1	V
Bias current monitor	DMI_Ibias	-10%	10%	mA

Block Diagram of Transceiver:

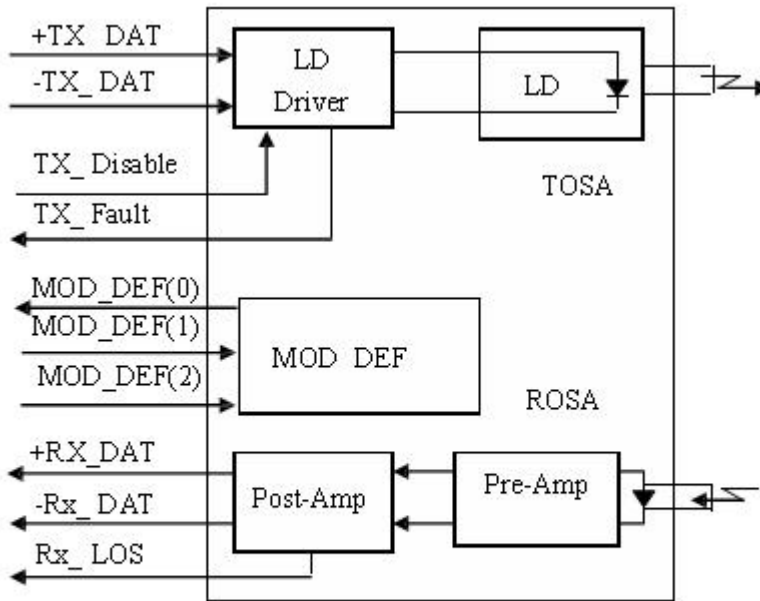


Figure1: Block Diagram

Pin Assignment:

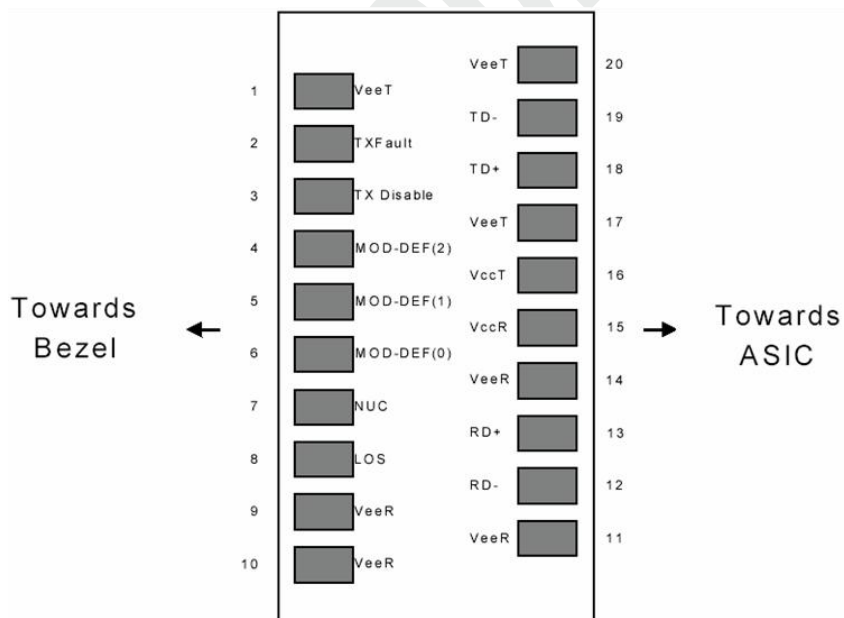


Figure2:Diagram of Host Board Connector Block Pin Numbers and Names

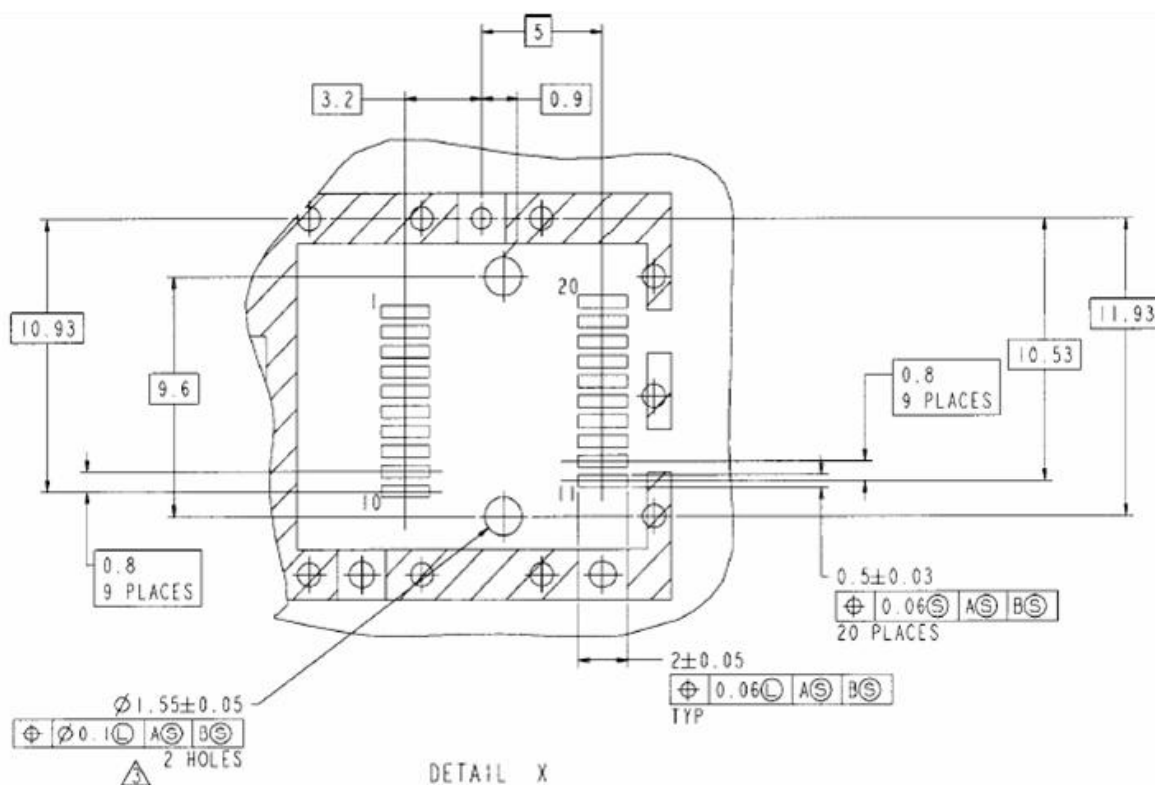


Figure 3. SFP Host Board Mechanical Layout

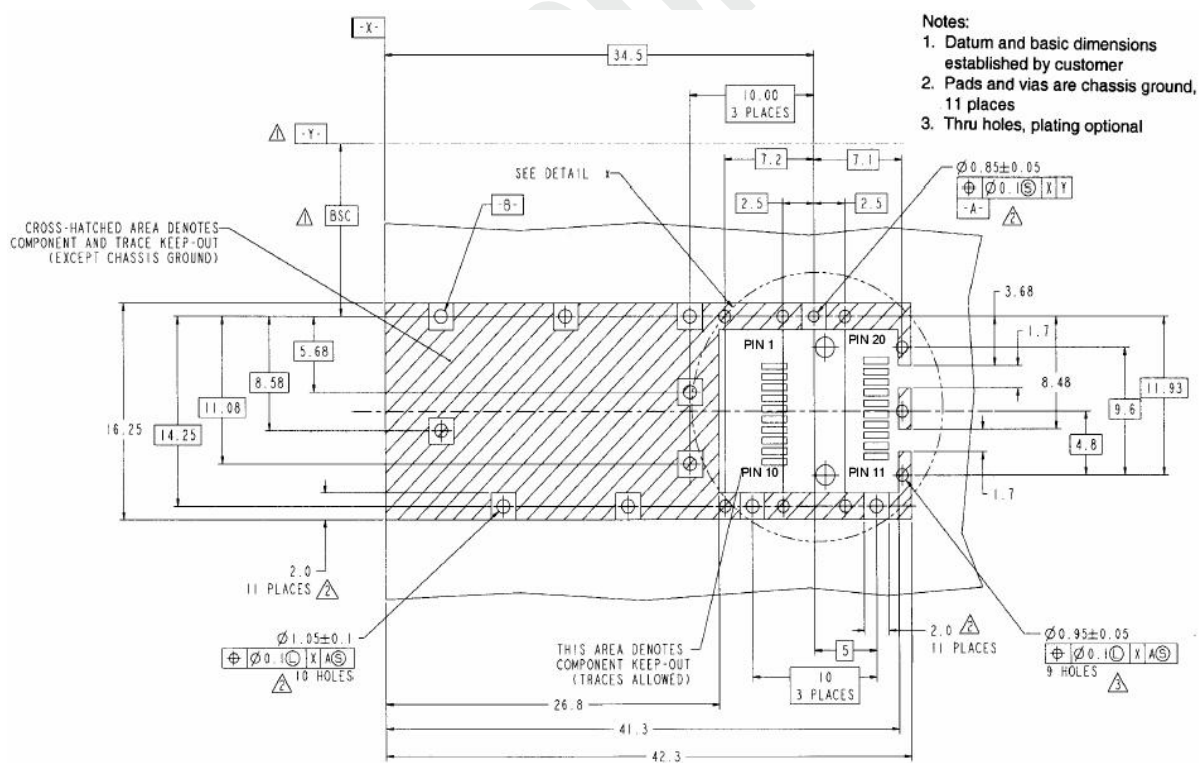


Figure 4. SFP Host Board Mechanical Layout (Cont)

Pin Description:

Pin No	Name	Function	Plug Seq	Notes
1	VeeT	Transmitter Ground	1	1
2	TX Fault	Transmitter Fault Indication	3	
3	TX Disable	Transmitter Disable	3	2
4	MOD-DEF2	Module Definition	2	3
5	MOD-DEF1	Module Definition 1	3	3
6	MOD-DEF0	Module Definition 0	3	3
7	Rate Select	Not Connected	3	4
8	LOS	Loss of Signal	3	5
9	VeeR	Receiver Ground	1	1
10	VeeR	Receiver Ground	1	1
11	VeeR	Receiver Ground		1
12	RD-	Inv. Received Data Out	3	6
13	RD+	Received Data Out	3	6
14	VeeR	Receiver Ground	3	1
15	VccR	Receiver Power	2	1
16	VccT	Transmitter Power	2	
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	6
19	TD-	Inv. Transmit In	3	6
20	VeeT	Transmitter Ground	1	

Note:

1. Circuit ground is internally isolated from chassis ground.
 2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V
 3. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. MOD_DEF(0) pulls line low to indicate module is plugged in.
 4. Rate select is not used
 5. LOS is open collector output. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
- AC Coupled

Recommended Circuit:

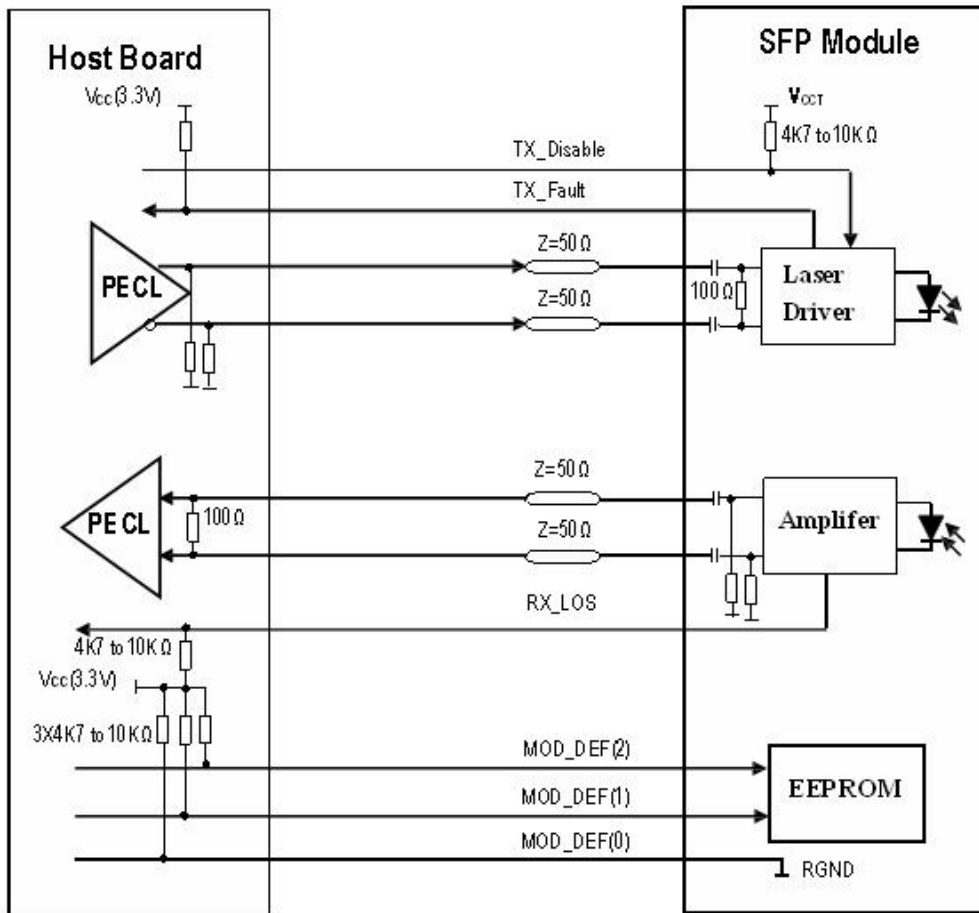


Figure 5. SFP Host Recommended Circuit

Serial ID Memory Contents:

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			
0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	Fiber Channel
11	1	Encoding	8B10B (01h)
12	1	BR, Nominal	Nominal baud rate, unit of 100Mbps
13	1	Reserved	(0000h)
14	1	Length(9um, km)	Link length supported for 9/125um fiber, units of km
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m

18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name: Fibersum
36	1	Reserved	
37-39	3	Vendor OUI	SFP transceiver vendor OUI ID
40-55	16	Vendor PN	Part Number: "SFP4G-LW-31-10 " (ASCII)
56-59	4	Vendor rev	Revision level for part number
60-61	2	Wavelength	Laser wavelength
62	1	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
Extended ID Fields			
64-65	2	Option	Indicates which optical SFP signals are implemented(001Ah = LOS, TX_FAULT, TX_DISABLE all
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %
68-83	16	Vendor SN	Serial number (ASCII)
84-91	8	Date code	Manufacturing date code
92	1	Diagnostic Type	Diagnostics
93	1	Enhanced Options	Diagnostics
94	1	SFF-8472	Diagnostics
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
Vendor Specific ID Fields			
96-127	32	Readable	Vendor specific data, read only

Diagnostics Memory Contents(A2h) :

Data Address	Length (Byte)	Name of Length	Description and Contents
Diagnostic and control/status fields			
0-39	40	A/W Thresholds	Diagnostic Flag Alarm and Warning Thresholds
40-55	16	Unallocated	
56-91	16	Ext Cal	Diagnostic calibration constants for optional External
92-94	3	Unallocated	
95	1	CC_DMI	Check code for Base Diagnostic Fields (addresses 0 to 94)
96-105	10	Diagnostics	Diagnostic Monitor Data (internally or externally
106-109	4	Unallocated	
110	1	Status/Control	Optional Status and Control Bits
111	1	Reserved	Reserved for SFF-8079
112-113	2	Alarm Flags	Diagnostic Alarm Flag Status Bits

114-115	2	Unallocated	
116-117	2	Warning Flags	Diagnostic Warning Flag Status Bits
118-119	2	Ext	Extended module control and status bytes
General use fields			
120-127	8	Vendor	Vendor specific memory addresses
128-247	120	User EEPROM	User writable non-volatile memory
248-255	8	Vendor Control	Vendor specific control addresses

References

“fiber Channel Physical and Signaling Interface (FC-PH, FC-PH2, FC-PH3)”. American National Standard for Information Systems.


“fiber Channel Draft Physical Interface Specification (FC-PI 13.0)”. American National Standard for Information Systems.

Small Form-factor Pluggable (SFP) Transceiver Multi-source Agreement (MSA)

September 14, 2000.

“Digital Diagnostics Monitoring Interface for Optical Transceivers”. SFF Document Number SFF-8472, Revision 9.3.

Mechanical Dimensions:

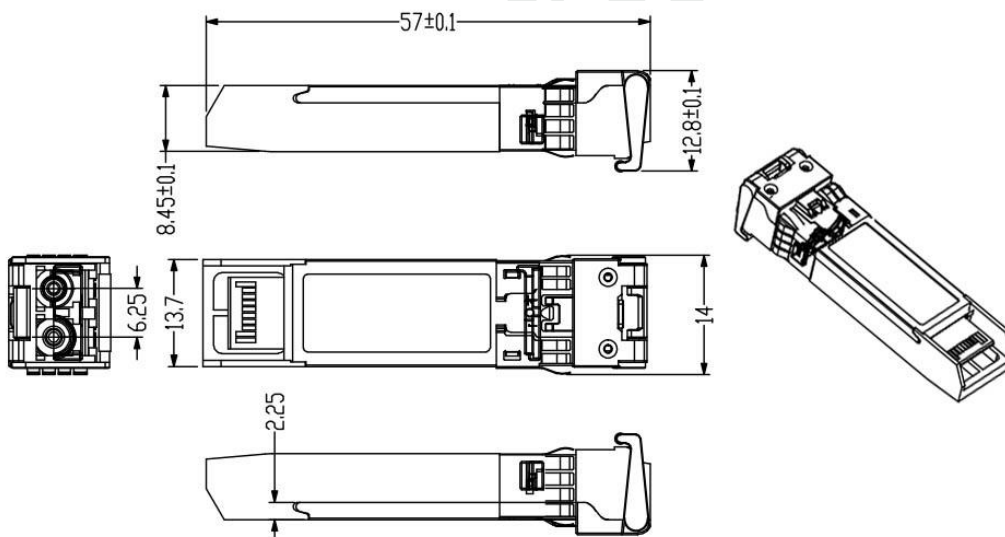

Fibersum reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Copyright Powered by Fibersum.com Inc. All Rights Reserved.